


Mill - Thread Solid Carbide



G 55° Fast MT With internal coolant bore

Same Tool for Internal and External Thread

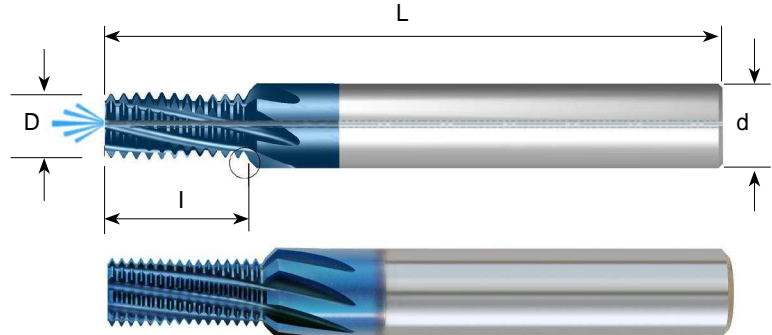



Pitch TPI	Standard	Ordering Code	d	D	No. of Flutes	I	L
28	G1/8	FMT08078H14 28W	8	7.8	8	14.1	64
19	G1/4-3/8	FMT1010G16 19W	10	10.0	7	16.7	73
14	G1/2-7/8	FMT1414H26 14W	14	14.0	8	26.3	84
11	G≥1	FMT1616H38 11W	16	16.0	8	38.1	105

Order example: FMT 1616 H38 11W MT8

* Without cutting chamfer

Whitworth BSW With internal coolant through the flutes

Same Tool for Internal and External Thread

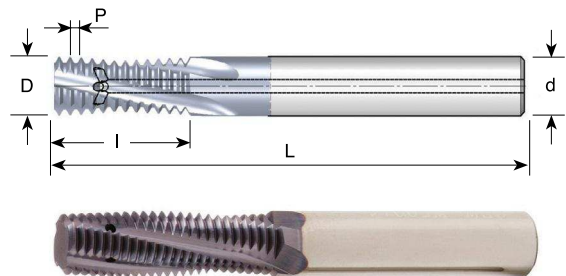

Pitch TPI	Standard	Ordering Code	d	D	No. of Flutes	I	L
* 20	1/4	MTZ06046C12 20W	6	4.6	3	12.1	58
18	5/16	MTZ06053C14 18W	6	5.3	3	14.8	58
16	3/8	MTZ08068C16 16W	8	6.8	3	16.7	64
16	1/2	MTZ10092D24 16W	10	9.2	4	24.6	73
14	7/16	MTZ08078D20 14W	8	7.8	4	20.9	64
12	1/2	MTZ10086D24 12W	10	8.6	4	24.4	73
11	5/8	MTZ12109D28 11W	12	10.9	4	28.9	84

Order example: MTZ 08064C16 16 W MT7

* Cutter without coolant