
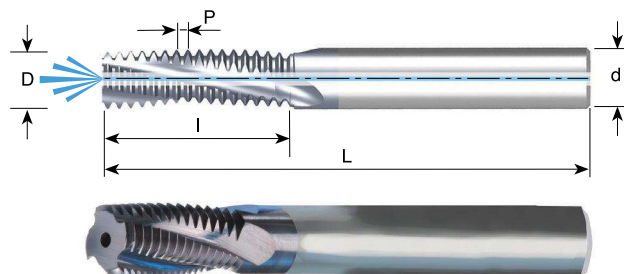


# Mill - Thread Solid Carbide



## BSPT With internal coolant bore Same Tool for Internal and External Thread



Pitch TPI	Standard	Ordering Code	d	D	No. of Flutes	I	L
28	RC1/8	<b>MTB08078C14 28 BSPT</b>	8	7.8	3	14.1	64
19	RC1/4-3/8	<b>MTB1010D16 19 BSPT</b>	10	10.0	4	16.7	73
14	RC1/2-7/8	<b>MTB1616E26 14 BSPT</b>	16	16.0	5	26.3	105
11	RC1-2	<b>MTB1616D28 11 BSPT</b>	16	16.0	4	28.9	105

Order example: MTB 08078C14 28 BSPT MT7

## BSPT With internal coolant through the flutes Same Tool for Internal and External Thread

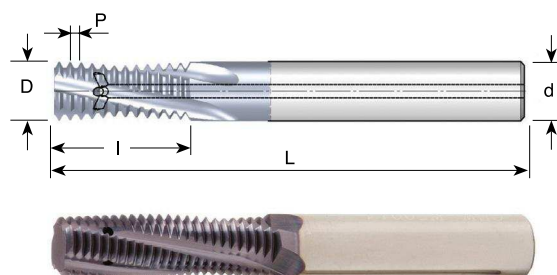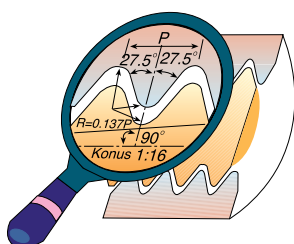

Pitch TPI	Standard	Ordering Code	d	D	No. of Flutes	I	L
28	RC1/8	<b>MTZ08078C14 28 BSPT</b>	8	7.8	3	14.1	64
19	RC1/4-3/8	<b>MTZ1010D16 19 BSPT</b>	10	10.0	4	16.7	73
14	RC1/2-7/8	<b>MTZ1616E26 14 BSPT</b>	16	16.0	5	26.3	101
11	RC1-2	<b>MTZ1616D28 11 BSPT</b>	16	16.0	4	28.9	101

Order example: MTZ 1010D16 19 BSPT MT7

For conical preparation end mills see page 221